




|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 1 Input Parameters

|                                                                                     |                                |                   |                             |         |
|-------------------------------------------------------------------------------------|--------------------------------|-------------------|-----------------------------|---------|
| Main Module                                                                         | Moment Connection              |                   |                             |         |
| Module                                                                              | Base Plate Connection          |                   |                             |         |
| Connectivity                                                                        | Moment Base Plate              |                   |                             |         |
| End Condition                                                                       | Fixed                          |                   |                             |         |
| Axial Compression (kN)                                                              | 900.0                          |                   |                             |         |
| Axial Tension/Uplift (kN)                                                           | 27.0                           |                   |                             |         |
| Shear Force (kN)                                                                    |                                |                   |                             |         |
| - Along major axis (z-z)                                                            | 85.0                           |                   |                             |         |
| - Along minor axis (y-y)                                                            | 12.0                           |                   |                             |         |
| Bending Moment (kNm)                                                                |                                |                   |                             |         |
| - Major axis ( $M_{z-z}$ )                                                          | 123.0                          |                   |                             |         |
| - Minor axis ( $M_{y-y}$ )                                                          | 0.0                            |                   |                             |         |
| Column Section - Mechanical Properties                                              |                                |                   |                             |         |
|  | Column Section                 |                   | PBP 400 X 140.2             |         |
|                                                                                     | Material                       |                   | E 350 (Fe 490)              |         |
|                                                                                     | Ultimate Strength, $F_u$ (MPa) |                   | 490.0                       |         |
|                                                                                     | Yield Strength, $F_y$ (MPa)    |                   | 350.0                       |         |
|                                                                                     | Mass, $m$ (kg/m)               | 140.2             | $I_z$ (cm <sup>4</sup> )    | 40200.0 |
|                                                                                     | Area, $A$ (cm <sup>2</sup> )   | 178.0             | $I_y$ (cm <sup>4</sup> )    | 16000.0 |
|                                                                                     | None                           | None              | $r_z$ (cm)                  | 15.0    |
|                                                                                     | $D$ (mm)                       | 352.0             | $r_y$ (cm)                  | 9.5     |
|                                                                                     | $B$ (mm)                       | 392.0             | $Z_z$ (cm <sup>3</sup> )    | 2280.0  |
|                                                                                     | $T$ (mm)                       | 16                | $Z_y$ (cm <sup>3</sup> )    | 820.0   |
|                                                                                     | $t$ (mm)                       | 16.0              | $Z_{pz}$ (cm <sup>3</sup> ) | 2540.0  |
|                                                                                     | Flange Slope                   | 90                | $Z_{py}$ (cm <sup>3</sup> ) | 1250.0  |
|                                                                                     | $R_1$ (mm)                     | 15.0              |                             |         |
|                                                                                     | $R_2$ (mm)                     | 0.0               |                             |         |
| Base Plate - Design Preference                                                      |                                |                   |                             |         |
| Material                                                                            |                                | E 250 (Fe 410 W)A |                             |         |
| Ultimate Strength, $F_u$ (MPa)                                                      |                                | 410               |                             |         |
| Yield Strength, $F_y$ (MPa)                                                         |                                | 250               |                             |         |
|                                                                                     |                                |                   |                             |         |

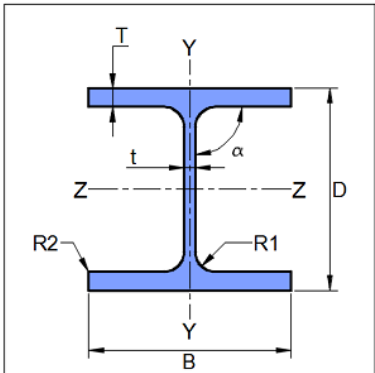

|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Stiffener/Shear Key - Design Preference                         |                                                |
|-----------------------------------------------------------------|------------------------------------------------|
| Material                                                        | E 250 (Fe 410 W)A                              |
| Anchor Bolt Outside Column Flange - Input and Design Preference |                                                |
| Diameter (mm)                                                   | ['M24', 'M30']                                 |
| Property Class                                                  | ['12.9']                                       |
| Anchor Bolt Type                                                | End Plate Type                                 |
| Anchor Bolt Galvanized?                                         | Yes                                            |
| Designation                                                     | M24X559.7 IS5624 GALV                          |
| Hole Type                                                       | Over-sized                                     |
| Total Length (mm)                                               | 559.7                                          |
| Material Grade, $F_u$ (MPa)                                     | 1220.0                                         |
| Anchor Bolt Inside Column Flange - Input and Design Preference  |                                                |
| Diameter (mm)                                                   | ['M20', 'M24']                                 |
| Property Class                                                  | ['8.8', '9.8']                                 |
| Anchor Bolt Type                                                | End Plate Type                                 |
| Anchor Bolt Galvanized?                                         | Yes                                            |
| Designation                                                     | M20X409.5 IS5624 GALV                          |
| Hole Type                                                       | Over-sized                                     |
| Total Length (mm)                                               | 409.5                                          |
| Material Grade, $F_u$ (MPa)                                     | 830.0                                          |
| Friction Coefficient (between concrete and anchor bolt)         | 0.3                                            |
| Weld - Design Preference                                        |                                                |
| Type of Weld Fabrication                                        | Shop Weld                                      |
| Material Grade Overwrite, $F_u$ (MPa)                           | 510.0                                          |
| Detailing - Design Preference                                   |                                                |
| Edge Preparation Method                                         | b - Rolled, machine-flame cut, sawn and planed |
| Are the Members Exposed to Corrosive Influences?                | Yes                                            |
| Design - Design Preference                                      |                                                |
| Design Method                                                   | Limit State Design                             |
| Base Plate Analysis                                             | Elastic Analysis Method                        |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2 Design Checks

|               |      |
|---------------|------|
| Design Status | Pass |
|---------------|------|

### 2.1 Design Parameters

| Check                                             | Required | Provided                                                                                                                                                                                                                                                        | Remarks |
|---------------------------------------------------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Bearing Strength of Concrete (N/mm <sup>2</sup> ) |          | $\sigma_{br} = 0.45f_{ck}$<br>$= 0.45 \times 30$<br>$= 13.5$<br><br>[Ref. IS 456:2000, Cl.34.4]                                                                                                                                                                 | OK      |
| Grout Thickness (mm)                              |          | $t_g = 50$                                                                                                                                                                                                                                                      | OK      |
| Modular Ratio                                     |          | $E_s = 2 \times 10^5 \text{ (N/mm}^2\text{)}$<br>$E_c = 5000 \sqrt{f_{ck}} \text{ (N/mm}^2\text{)}$<br>$= 5000 \times \sqrt{30} = 27386.128$<br><br>$n = \frac{E_s}{E_c}$<br>$n = \frac{200000}{27386.128}$<br>$= 7.303$<br><br>[Ref. IS 800:2007, IS 456:2000] | OK      |
| Epsilon - stiffener plate                         |          | $\epsilon_{st} = \sqrt{\frac{250}{f_{yst}}}$<br>$= \sqrt{\frac{250}{250}}$<br>$= 1.0$<br><br>[Ref. IS 800:2007, Table2]                                                                                                                                         | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2.2 Load Consideration

| Check                                     | Required       | Provided                                                                                                                                                                                                                                                                            | Remarks |
|-------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Axial Compression (kN)                    | $P_x = 900.0$  | $P_u = \max(P_x, 0.3P_d), \text{ but, } \leq P_d$<br>$= \max(900.0, 0.3 \times 5663.64)$<br>$= \max(900.0, 1699.09)$<br>$\leq 5663.64$<br>$= 1699.09$<br><br>[Ref. IS 800:2007, Cl.10.7]<br><br>Note: $P_d$ is the design axial capacity of the column                              | Pass    |
| Axial Tension/Uplift (kN)                 |                | $P_{up} = 27.0$                                                                                                                                                                                                                                                                     | OK      |
| Shear Force - along major (z-z) axis (kN) | $V_d = 564.33$ | $V_1 = 85.0$                                                                                                                                                                                                                                                                        | Pass    |
| Shear Force - along minor (y-y) axis (kN) | $V_d = 564.33$ | $V_2 = 12.0$                                                                                                                                                                                                                                                                        | Pass    |
| Bending Moment - major (z-z) axis (kNm)   | $M_z = 123.0$  | $M_{zmin} = 0.5 * M_{dz}$<br>$= 0.5 \times 808.18$<br>$= 404.09$<br><br>$M_{uz} = \max(M_z, M_{zmin}), \text{ but, } \leq M_{dz}$<br>$= \max(123.0, 404.09)$<br>$\leq 808.18$<br>$= 404.09$<br><br>Note: The column is classified as compact.<br><br>[Ref. IS 800:2007, Cl.8.2.1.2] | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check             | Required   | Provided                                                                                                                                                                                                                                                           | Remarks |
|-------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Interaction Ratio | I.R. < 1.0 | $\begin{aligned} \text{I.R. axial} &= P_x/P_d \\ &= 900.0/5663.64 \\ &= 0.159 \\ \\ \text{I.R. moment} &= M_z/M_{dz} \\ &= 123.0/808.18 \\ &= 0.152 \\ \\ \text{I.R. sum} &= \text{I.R. axial} + \text{I.R. moment} \\ &= 0.159 + 0.152 \\ &= 0.311 \end{aligned}$ | Pass    |

## 2.3 Plate Washer and Nut Details - Anchor Bolt Outside Column Flange

| Check                           | Required | Provided                                       | Remarks |
|---------------------------------|----------|------------------------------------------------|---------|
| Plate Washer Size (mm)          |          | Square – 58X58<br>[Ref. IS 6649:1985, Table 2] | Pass    |
| Plate Washer Thickness (mm)     |          | $t_w = 8.5$<br>[Ref. IS 6649:1985, Table 2]    | Pass    |
| Plate Washer Hole Diameter (mm) |          | $d_h = 33$<br>[Ref. IS 6649:1985, Table 2]     | Pass    |
| Nut (hexagon) Thickness (mm)    |          | $t_n = 25.6$<br>[Ref. IS 1364-3:2002, Table 1] | Pass    |
| End Plate Size (mm)             |          | Square - 116 X 116                             | Pass    |
| End Plate Thickness (mm)        |          | 14                                             | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2.4 Plate Washer and Nut Details - Anchor Bolt Inside Column Flange

| Check                           | Required | Provided                                       | Remarks |
|---------------------------------|----------|------------------------------------------------|---------|
| Plate Washer Size (mm)          |          | Square – 45X45<br>[Ref. IS 6649:1985, Table 2] | Pass    |
| Plate Washer Thickness (mm)     |          | $t_w = 8.5$<br>[Ref. IS 6649:1985, Table 2]    | Pass    |
| Plate Washer Hole Diameter (mm) |          | $d_h = 22$<br>[Ref. IS 6649:1985, Table 2]     | Pass    |
| Nut (hexagon) Thickness (mm)    |          | $t_n = 18.0$<br>[Ref. IS 1364-3:2002, Table 1] | Pass    |
| End Plate Size (mm)             |          | Square - 90 X 90                               | Pass    |
| End Plate Thickness (mm)        |          | 14                                             | Pass    |

## 2.5 Anchor Bolt Summary - Outside Column Flange

| Check           | Required | Provided      | Remarks |
|-----------------|----------|---------------|---------|
| Diameter (mm)   |          | 30            | Pass    |
| Number of Bolts |          | $n_{out} = 4$ | Pass    |
| Property Class  |          | 12.9          | Pass    |

## 2.6 Anchor Bolt Summary - Inside Column Flange

| Check           | Required | Provided     | Remarks |
|-----------------|----------|--------------|---------|
| Diameter (mm)   |          | 20           | Pass    |
| Number of Bolts |          | $n_{in} = 2$ | Pass    |
| Property Class  |          | 8.8          | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2.7 Detailing Checks - Outside Column Flange

| Check                             | Required                                                                                                                                   | Provided | Remarks |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| Min. End Distance ( <i>mm</i> )   | $e_{\min} = 1.5d_0$<br>$= 1.5 \times 30.0$<br>$= 45.0$<br><br>[Ref. IS 800:2007, Cl.10.2.4.2]                                              | 90       | Pass    |
| Max. End Distance ( <i>mm</i> )   | $e_{\max} = 40 + 4t$<br>Where, $t = \min(75, 75)$<br>$= 40 + (4 \times 75)$<br>$e_{\max} = 340.0$<br><br>[Ref. IS 800:2007, Cl.10.2.4.3]   | 90       | Pass    |
| Min. Edge Distance ( <i>mm</i> )  | $e'_{\min} = 1.5d_0$<br>$= 1.5 \times 30.0$<br>$= 45.0$<br><br>[Ref. IS 800:2007, Cl.10.2.4.2]                                             | 90       | Pass    |
| Max. Edge Distance ( <i>mm</i> )  | $e'_{\max} = 40 + 4t$<br>Where, $t = \min(75, 75)$<br>$= 40 + (4 \times 75)$<br>$e'_{\max} = 340.0$<br><br>[Ref. IS 800:2007, Cl.10.2.4.3] | 90       | Pass    |
| Min. Pitch Distance ( <i>mm</i> ) | N/A                                                                                                                                        | 0.0      | N/A     |
| Max. Pitch Distance ( <i>mm</i> ) | N/A                                                                                                                                        | 0.0      | N/A     |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2.8 Detailing Checks - Inside Column Flange

| Check                       | Required                                                                                                                    | Provided | Remarks |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------|---------|
| Min. End Distance ( $mm$ )  | $e_{min} = 1.5d_0$ $= 1.5 \times 24.0$ $= 36.0$<br>[Ref. IS 800:2007, Cl.10.2.4.2]                                          | 45       | Pass    |
| Max. End Distance ( $mm$ )  | $e_{max} = 40 + 4t$ Where, $t = \min(75, 75)$ $= 40 + (4 \times 75)$ $e_{max} = 340.0$<br>[Ref. IS 800:2007, Cl.10.2.4.3]   | 45       | Pass    |
| Min. Edge Distance ( $mm$ ) | $e'_{min} = 1.5d_0$ $= 1.5 \times 24.0$ $= 36.0$<br>[Ref. IS 800:2007, Cl.10.2.4.2]                                         | 45       | Pass    |
| Max. Edge Distance ( $mm$ ) | $e'_{max} = 40 + 4t$ Where, $t = \min(75, 75)$ $= 40 + (4 \times 75)$ $e'_{max} = 340.0$<br>[Ref. IS 800:2007, Cl.10.2.4.3] | 45       | Pass    |

## 2.9 Base Plate Dimension (L X W)

| Check           | Required                                                                                             | Provided | Remarks |
|-----------------|------------------------------------------------------------------------------------------------------|----------|---------|
| Length ( $mm$ ) | $L = D + 2(e + e)$ $= 352.0 + 2 \times (90 + 90)$ $= 712.0$<br>[Ref. based on detailing requirement] | 715      | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check      | Required                                                                                                                       | Provided | Remarks |
|------------|--------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| Width (mm) | $W = (0.85B) + 2(e' + e')$ $= (0.85 \times 392.0) + 2 \times (90 + 90)$ $= 693.2$ <p>[Ref. based on detailing requirement]</p> | 695      | Pass    |

## 2.10 Base Plate Analysis

| Check                                                        | Required                                                                                                                                                                       | Provided                                                                                                                                                                               | Remarks |
|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Eccentricity - about major axis (mm)                         |                                                                                                                                                                                | $e_{zz} = \frac{M_{uz}}{P_u}$ $= \frac{404.09 \times 10^6}{1699.09 \times 10^3}$ $= 237.83$                                                                                            | OK      |
| Base Plate Type                                              | $e_{zz} \geq \frac{L_{\min}}{3}$ $237.83 \geq \frac{712.0}{3}$ $237.83 \geq 237.33$                                                                                            | Case 3: A smaller part of the base plate is under compression/bearing while a large tension force being transferred through the anchor bolts outside column flange on the tension side | OK      |
| k1                                                           | $k_1 = 3 \left( e_{zz} - \frac{L}{2} \right)$ $= 3 \left( 237.83 - \frac{715}{2} \right)$ $= -359.01$ <p>[Ref. Design of Welded Structures, Omer W Blodgett, section 3.3.]</p> |                                                                                                                                                                                        | OK      |
| Total Area of Anchor Bolt - under tension (mm <sup>2</sup> ) | $A_s = n \times \left( \frac{\pi}{4} \right) d^2$ $= 2 \times \left( \frac{\pi}{4} \right) \times 30^2$ $= 1414.0$                                                             |                                                                                                                                                                                        | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                                                                                  | Required                                                                                                                                                                                                                                                                     | Provided | Remarks |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| Lever Arm - distance between the centre of the column and the C.G of the bolt group under tension (mm) | $f = \left( \frac{L}{2} - e \right)$ $= \left( \frac{715}{2} - 90 \right)$ $= 267.5$ <p>[Ref. Design of Welded Structures, Omer W Blodgett, section 3.3]</p>                                                                                                                 |          | OK      |
| k2                                                                                                     | $k_2 = \frac{6 n A_s}{W} \left( f + e_{zz} \right)$ $= \frac{6 \times 7.303 \times 1414.0}{695} \times \left( 267.5 + 237.83 \right)$ $= 45049.73$ <p>Note: <math>n</math> is the modular ratio.</p> <p>[Ref. Design of Welded Structures, Omer W Blodgett, section 3.3]</p> |          | OK      |
| k3                                                                                                     | $k_3 = - k_2 \left( \frac{L}{2} + f \right)$ $= - 45049.73 \left( \frac{715}{2} + 267.5 \right)$ $= -28156081.25$ <p>[Ref. Design of Welded Structures, Omer W Blodgett, section 3.3]</p>                                                                                    |          | OK      |
| Effective Bearing Length (mm)                                                                          | $y^3 + k_1 y^2 + k_2 y + k_3 = 0$ $y^3 - 359.01 \times y^2 + 45049.73 \times y - 28156081.25 = 0$ $y = 414.0$ <p>[Ref. Design of Welded Structures, Omer W Blodgett, section 3.3]</p>                                                                                        |          | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                                                                | Required                                                                                                                                                                                                                                                                                                                 | Provided | Remarks |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|---------|
| Total Tension Demand (kN)                                                            | $P_t = - P_u \left[ \frac{\frac{L}{2} - \frac{y}{3} - e_{zz}}{\frac{L}{2} - \frac{y}{3} + f} \right]$ $= - 1699.09 \times \left[ \frac{\frac{715}{2} - \frac{414.0}{3} - 237.83}{\frac{715}{2} - \frac{414.0}{3} + 267.5} \right]$ $= 63.95$ <p>[Ref. Design of Welded Structures,<br/>Omer W Blodgett, section 3.3]</p> |          | OK      |
| Critical Section - compression side (mm)                                             | $y_{critical} = \frac{L - 0.95D}{2}$ $= \frac{715 - (0.95 \times 352.0)}{2}$ $= 190.3$ <p><math>y &gt; y_{critical}</math> (414.0 &gt; 190.3)<br/>Therefore, <math>y_{critical} = 190.3</math></p> <p>Note: The critical section lies at 0.95D of the column section.</p>                                                |          | OK      |
| Bending Moment - at critical section (due to bearing stress) (N - mm)                | $M_{critical1} = 0.45 f_{ck} W y_{critical} \times \left( \frac{y_{critical}}{2} \right)$ $= 0.45 \times 30.0 \times 695 \times 190.3 \times \left( \frac{190.3}{2} \right)$ $= 169.89 \times 10^6$                                                                                                                      |          | OK      |
| Lever Arm - distance between center of the flange and bolt group (tension side) (mm) | $l = \frac{L}{2} - \frac{D}{2} + \frac{T}{2} - e$ $= \frac{715}{2} - \frac{352.0}{2} + \frac{16}{2} - 90$ $= 99.5$                                                                                                                                                                                                       |          | OK      |
| Bending Moment - at critical section (due to tension in the anchor bolts) (N - mm)   | $M_{critical2} = P_t l$ $= 63.95 \times 1000 \times 99.5$ $= 6.36 \times 10^6$                                                                                                                                                                                                                                           |          | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                          | Required                                                                                                                                                                                               | Provided                                                                                                                                                                                                                    | Remarks |
|------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Maximum Bending Moment ( $N - mm$ )            | $M_{critical} = \max (M_{critical1}, M_{critical2})$<br>$= \max (169.89 \times 10^6, 6.36 \times 10^6)$<br>$= 169.89 \times 10^6$                                                                      | Bending of the base plate is governed by the bearing stress caused by the footing                                                                                                                                           | OK      |
| Moment Capacity of Base Plate                  | $z_{eplate} = \frac{W t_p^2}{6}$<br>$M_{dplate} = 1.5 z_{eplate} f_{yp} / \gamma_{m0}$<br>$= \frac{1.5 \left( \frac{W \times t_p^2}{6} \right) f_{yp}}{\gamma_{m0}}$<br>[Ref. IS 800:2007, Cl.8.2.1.2] |                                                                                                                                                                                                                             | OK      |
| Thickness of Base Plate (mm)                   | $t < t_p \leq 120$<br>$16 < t_p \leq 120$                                                                                                                                                              | $M_{dplate} = M_{critical}$<br>$t_p = \left[ \frac{4 M_{critical}}{W (f_{yp} / \gamma_{m0})} \right]^{0.5}$<br>$t_p = \left[ \frac{4 \times 169.89 \times 10^6}{695 \times (250/1.1)} \right]^{0.5}$<br>$= 65.59$<br>$= 75$ | Pass    |
| Maximum Bearing Stress on Footing ( $N/mm^2$ ) | $\sigma_{callowable} = \sigma_{br}$<br>$= 13.5$                                                                                                                                                        | $\sigma_{cmax} = \frac{P_t y}{A_s n \left( \frac{L}{2} - y + f \right)}$<br>$= \frac{63.95 \times 10^3 \times 414.0}{1414.0 \times 7.303 \times \left( \left( \frac{715}{2} - 414.0 + 267.5 \right) \right)}$<br>$= 12.15$  | Pass    |

## 2.11 Anchor Bolt Design - Outside Column Flange

| Check                   | Required | Provided                                                                                                                                                                             | Remarks |
|-------------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Shear Capacity ( $kN$ ) |          | $V_{dsb} = \frac{f_{ub} n_n A_{nb}}{\sqrt{3} \gamma_{mb}}$<br>$= \frac{1220.0 \times 1 \times 561}{1000 \times \sqrt{3} \times 1.25}$<br>$= 316.12$<br>[Ref. IS 800:2007, Cl.10.3.3] | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                 | Required                                                                          | Provided                                                                                                                                                                                                                                                                                                       | Remarks |
|---------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Kb                                    |                                                                                   | $k_b = \min \left( \frac{e}{3d_0}, \frac{f_{ub}}{f_u}, 1.0 \right)$ $= \min \left( \frac{90}{3 \times 30.0}, \frac{1220.0}{490.0}, 1.0 \right)$ $= \min(1.0, 2.49, 1.0)$ $= 1.0$ <p>[Ref. IS 800:2007, Cl.10.3.4]</p>                                                                                          | OK      |
| Bearing Capacity (kN)                 |                                                                                   | $V_{dpb} = \frac{2.5k_b d t f_u}{\gamma_{mb}}$ $= \frac{2.5 \times 1.0 \times 30 \times 75 \times 410}{1000 \times 1.25}$ $= 1457.54$ $= 0.7 \times 1457.54$ $= 1020.28$ <p>Note: The bearing capacity is reduced since the hole type is Over-sized or Short-slotted.</p> <p>[Ref. IS 800:2007, Cl.10.3.4]</p> | OK      |
| Bolt Capacity (kN)                    |                                                                                   | $V_{db} = \min (V_{dsb}, V_{dpb})$ $= \min (316.12, 1020.28)$ $= 316.12$ <p>[Ref. IS 800:2007, Cl.10.3.2]</p>                                                                                                                                                                                                  | OK      |
| Tension Demand - per anchor bolt (kN) | $T_b = \frac{P_t}{n_{out}/2}$ $= \frac{63.95}{4/2}$ $= \frac{63.95}{2}$ $= 31.98$ | $T_{db} = 0.90 f_{ub} A_n / \gamma_{mb}$ $< f_{yb} A_{sb} (\gamma_{mb} / \gamma_{m0})$ $= \min \left( 0.90 \times 1220.0 \times 561 / 1.25, \right.$ $\left. 1100.0 \times 707 \times (1.25/1.1) \right)$ $= \min(492.78, 883.75)$ $= 492.78$ <p>[Ref. IS 800:2007, Cl.10.3.5]</p>                             | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                       | Required                                                       | Provided                                                                                                                                                                                                                                                                                                                    | Remarks |
|---------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Anchor Length - above concrete footing (mm) |                                                                | $l_1 = t_g + t_p + t_w + t_n + 20$ $= 50 + 75 + 8.5 + 25.6 + 20$ $= 179.1$                                                                                                                                                                                                                                                  | Pass    |
| Anchor Length - below concrete footing (mm) |                                                                | $l_2 = \left[ \frac{T_{db}}{15.5 \sqrt{f_{ck}}} \right]^{0.67}$ $= \left[ \frac{492.78 \times 10^3}{15.5 \times \sqrt{30.0}} \right]^{0.67}$ $= 332.44$ $= 335$ $= \max(335, 320)$ $= 335$<br>$= 335 + t_n + 20$ $= 335 + 25.6 + 20$ $= 380.6$<br>[Reference: Design of Steel Structures by N.Subramanian, (2019 edition).] | Pass    |
| Anchor Length - total (mm)                  | $320 \leq l_a \leq 2000$<br>[Reference: IS 5624:1993, Table 1] | $l_a = l_1 + l_2$ $= 179.1 + 380.6$ $= 559.7$                                                                                                                                                                                                                                                                               | Pass    |

## 2.12 Anchor Bolt Design - Inside Column Flange

| Check                     | Required                                        | Provided | Remarks |
|---------------------------|-------------------------------------------------|----------|---------|
| Shear Capacity ( $kN$ )   | The bolts are not designed to carry shear force | N/A      | N/A     |
| Bearing Capacity ( $kN$ ) | The bolts are not designed to carry shear force | N/A      | N/A     |
| Bolt Capacity ( $kN$ )    | N/A                                             | N/A      | N/A     |
| Tension Demand ( $kN$ )   | $P_{uplift} = 27.0$                             |          | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                       | Required                                                              | Provided                                                                                                                                                                                                                                                                                                                    | Remarks |
|---------------------------------------------|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Tension Capacity ( $kN$ )                   |                                                                       | $T_{db} = 0.90 f_{ub} A_n / \gamma_{mb}$ $< f_{yb} A_{sb} (\gamma_{mb} / \gamma_{m0})$ $= \min \left( 0.90 \times 830.0 \times 245 / 1.25, \right.$ $\left. 660.0 \times 314 \times (1.25/1.1) \right)$ $= \min(146.41, 235.5)$ $= 146.41$<br>[Ref. IS 800:2007, Cl.10.3.5]                                                 | OK      |
| Anchor Bolts Required ( $kN$ )              | $n_{in} = \frac{P_{uplift}}{T_{db}}$ $= \frac{27.0}{146.41}$ $= 0.18$ | 2                                                                                                                                                                                                                                                                                                                           | Pass    |
| Anchor Length - above concrete footing (mm) |                                                                       | $l_1 = t_g + t_p + t_w + t_n + 20$ $= 50 + 75 + 8.5 + 18.0 + 20$ $= 171.5$                                                                                                                                                                                                                                                  | Pass    |
| Anchor Length - below concrete footing (mm) |                                                                       | $l_2 = \left[ \frac{T_{db}}{15.5 \sqrt{f_{ck}}} \right]^{0.67}$ $= \left[ \frac{146.41 \times 10^3}{15.5 \times \sqrt{30.0}} \right]^{0.67}$ $= 147.43$ $= 150$ $= \max(150, 200)$ $= 200$<br>$= 200 + t_n + 20$ $= 200 + 18.0 + 20$ $= 238.0$<br>[Reference: Design of Steel Structures by N.Subramanian, (2019 edition).] | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                      | Required                                                      | Provided                                            | Remarks |
|----------------------------|---------------------------------------------------------------|-----------------------------------------------------|---------|
| Anchor Length - total (mm) | $200 \leq l_a \leq 800$<br>[Reference: IS 5624:1993, Table 1] | $l_a = l_1 + l_2$<br>$= 171.5 + 238.0$<br>$= 409.5$ | Pass    |

### 2.13 Stiffener Design - Along Column Flange

| Check                                              | Required                                                                                                                                                                                                                                                         | Provided                                                                                                                     | Remarks |
|----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|---------|
| Length of Stiffener (mm)                           |                                                                                                                                                                                                                                                                  | $L_{stf} = \frac{W - B}{2}$<br>$= \frac{695 - 392.0}{2}$<br>$= 151.5$<br>[Ref. based on detailing requirement]               | OK      |
| Height of Stiffener (mm)                           |                                                                                                                                                                                                                                                                  | $H_{stf} = L_{stf} + 50$<br>$= 151.5 + 50$<br>$= 201.5$                                                                      | OK      |
| Thickness of Stiffener (mm)                        | $t_{stf} = \left( \frac{L_{stf}}{13.6 \times \epsilon_{st}} \right) \geq T$<br>$= \max \left( \left( \frac{151.5}{13.6 \times 1.0} \right), 16 \right)$<br>$= \max(11.14, 16)$<br>Note: The stiffener is assumed as semi-compact.<br>[Ref. IS 800:2007, Table 2] | 25                                                                                                                           | Pass    |
| Stress (average) at Stiffener (N/mm <sup>2</sup> ) | $= \sigma_{allowable}$<br>$= 13.5$                                                                                                                                                                                                                               | Since, $y > y_{critical}$ ( $414.0 > 190.3$ )<br>$\sigma_{stf} = \frac{\sigma_{cmax}}{2}$<br>$= \frac{12.15}{2}$<br>$= 6.08$ | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                       | Required                                                                                                                                                     | Provided                                                                                                                                                                                                                                                                                             | Remarks |
|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Shear on Stiffener ( $kN$ )                 | $V_{stf} = \sigma_{stf} \left( y \times L_{stf} \right)$ $= 6.08 \times \left( 414.0 \times 151.5 \right) \times 10^{-3}$ $= 381.344$                        | $V_{df} = \frac{A_{vg} f_{yst}}{\sqrt{3} \gamma_{m0}}$ $= \frac{(H_{stf} \times t_{stf}) f_{yst}}{\sqrt{3} \gamma_{m0}}$ $= \frac{(201.5 \times 25) \times 250}{\sqrt{3} \times 1.1 \times 10^3}$ $= 661.0$ <p>Note: Stiffener is not restricted to low shear.<br/>[Ref. IS 800:2007 (Cl.8.4.1)]</p> | Pass    |
| Section Modulus of the Stiffener ( $mm^3$ ) |                                                                                                                                                              | $z_{est} = 169.18 \times 10^3$                                                                                                                                                                                                                                                                       | OK      |
| Moment on Stiffener ( $kNm$ )               | $M_{stf} = \sigma_{stf} \left( y \times \frac{L_{stf}^2}{2} \right)$ $= 6.08 \times \left( 414.0 \times \frac{151.5^2}{2} \right) \times 10^{-6}$ $= 28.887$ | $M_{df} = \frac{\beta_b z_{est} f_{yst}}{\gamma_{m0}}$ $= \frac{1 \times z_{est} f_{yst}}{\gamma_{m0}} \quad (\beta_b = 1)$ $= \frac{1 \times 169.18 \times 10^3 \times 250}{1.1 \times 10^6}$ $= 38.449$ <p>[Ref. IS 800:2007 (Cl.8.2.1.2)]</p>                                                     | Pass    |
| Weld Size (mm)                              | 10                                                                                                                                                           | 12                                                                                                                                                                                                                                                                                                   | Pass    |

## 2.14 Stiffener Design - Along Column Web

| Check                    | Required | Provided                                                                                                      | Remarks |
|--------------------------|----------|---------------------------------------------------------------------------------------------------------------|---------|
| Length of Stiffener (mm) |          | $L_{stw} = \frac{L - D}{2}$ $= \frac{715 - 352.0}{2}$ $= 181.5$ <p>[Ref. based on detailing requirement.]</p> | OK      |
| Height of Stiffener (mm) |          | $H_{stw} = L_{stw} + 50$ $= 181.5 + 50$ $= 231.5$                                                             | OK      |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

| Check                                               | Required                                                                                                                                                                                                                                                                                                                                                                                  | Provided                                                                                                                                                                                                                                                                                               | Remarks |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| Thickness of Stiffener (mm)                         | $t_{stw} = \left( \frac{L_{stw}}{13.6 \times \epsilon_{st}} \right) \geq t$ $= \max \left( \left( \frac{181.5}{13.6 \times 1.0} \right), 16.0 \right)$ $= \max(13.35, 16.0)$ <p>[Ref. IS 800:2007, Table 2.]</p>                                                                                                                                                                          | 40                                                                                                                                                                                                                                                                                                     | Pass    |
| Stress (average) at Stiffener (mm)                  | $= \sigma_{allowable}$ $= 13.5$                                                                                                                                                                                                                                                                                                                                                           | $\sigma_{stw} = \frac{\sigma_{cmax} + \sigma_{crt}}{2}$ $= \frac{12.15 + 6.57}{2}$ $= 9.36$                                                                                                                                                                                                            | Pass    |
| Shear on Stiffener (kN)                             | $V_{stw} = \sigma_{stw} (B L_{stw})$ $= 9.36 \times (392.0 \times 181.5) \times 10^{-3}$ $= 665.945$                                                                                                                                                                                                                                                                                      | $V_{dw} = \frac{A_{vg} f_{yst}}{\sqrt{3} \gamma_{m0}}$ $= \frac{(H_{stw} \times t_{stw}) f_{yst}}{\sqrt{3} \gamma_{m0}}$ $= \frac{(231.5 \times 40) \times 250}{\sqrt{3} \times 1.1 \times 10^3}$ $= 1215.06$ <p>Note: Stiffener is not restricted to low shear.<br/>[Ref. IS 800:2007 (Cl.8.4.1)]</p> | Pass    |
| Section Modulus of the Stiffener (mm <sup>3</sup> ) |                                                                                                                                                                                                                                                                                                                                                                                           | $z_{est} = 357.28 \times 10^3$                                                                                                                                                                                                                                                                         | OK      |
| Moment on Stiffener (kNm)                           | $M_{stw} = \left( \sigma_{crt} \times B \times \frac{L_{stw}^2}{2} \right) +$ $\left( \left( \sigma_{cmax} - \sigma_{crt} \right) \times B \times \frac{L_{stw}^2}{3} \right)$ $= \left[ \left( 6.57 \times 392.0 \times \frac{181.5^2}{2} \right) + \right.$ $\left. \left( \left( 12.15 - 6.57 \right) \times 392.0 \times \frac{181.5^2}{3} \right) \right] \times 10^{-6}$ $= 66.439$ | $M_{dw} = \frac{\beta_b z_{est} f_{yst}}{\gamma_{m0}}$ $= \frac{1 \times z_{est} f_{yst}}{\gamma_{m0}} \quad (\beta_b = 1)$ $= \frac{1 \times 357.28 \times 10^3 \times 250}{1.1 \times 10^6}$ $= 81.2$ <p>[Ref. IS 800:2007 (Cl.8.2.1.2)]</p>                                                         | Pass    |
| Weld Size (mm)                                      | 10                                                                                                                                                                                                                                                                                                                                                                                        | 12                                                                                                                                                                                                                                                                                                     | Pass    |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 2.15 Shear Design

| Check                                      | Required                 | Provided                                                        | Remarks                       |
|--------------------------------------------|--------------------------|-----------------------------------------------------------------|-------------------------------|
| Shear Resistance ( $kN$ )                  |                          | $V_r = P_u \times \mu$<br>$= 1699.09 \times 0.45$<br>$= 764.59$ | <b>OK</b>                     |
| Shear Key Requirement - along column depth | $V_1 = 85.0 \text{ } kN$ | $V_1 \leq V_r$<br>$85.0 \leq 764.59$                            | <b>Shear key not required</b> |
| Shear Key Requirement - along column width | $V_2 = 12.0 \text{ } kN$ | $V_2 \leq V_r$<br>$12.0 \leq 764.59$                            | <b>Shear key not required</b> |



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

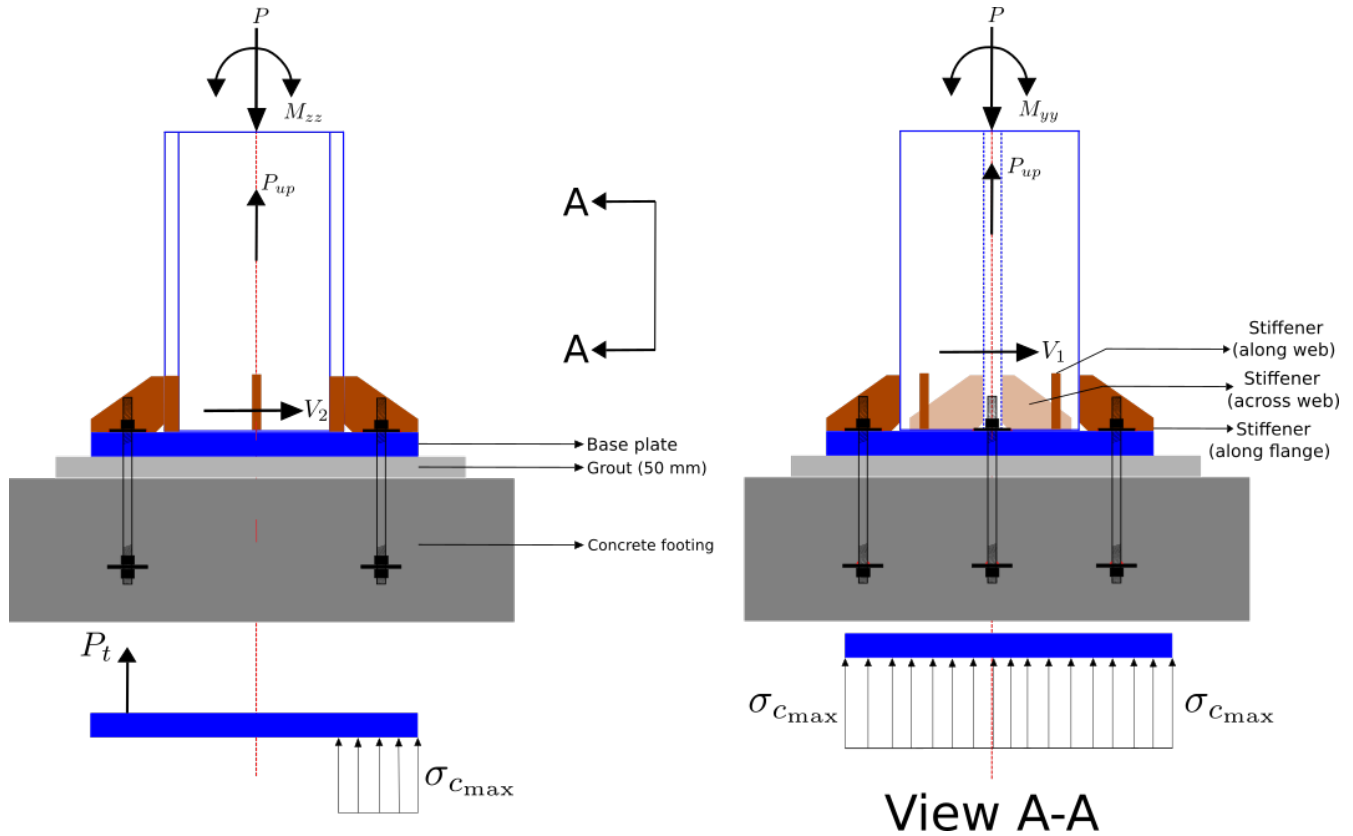


Figure 1: Typical Base Plate Details

### 3 2D Drawings (Typical)



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

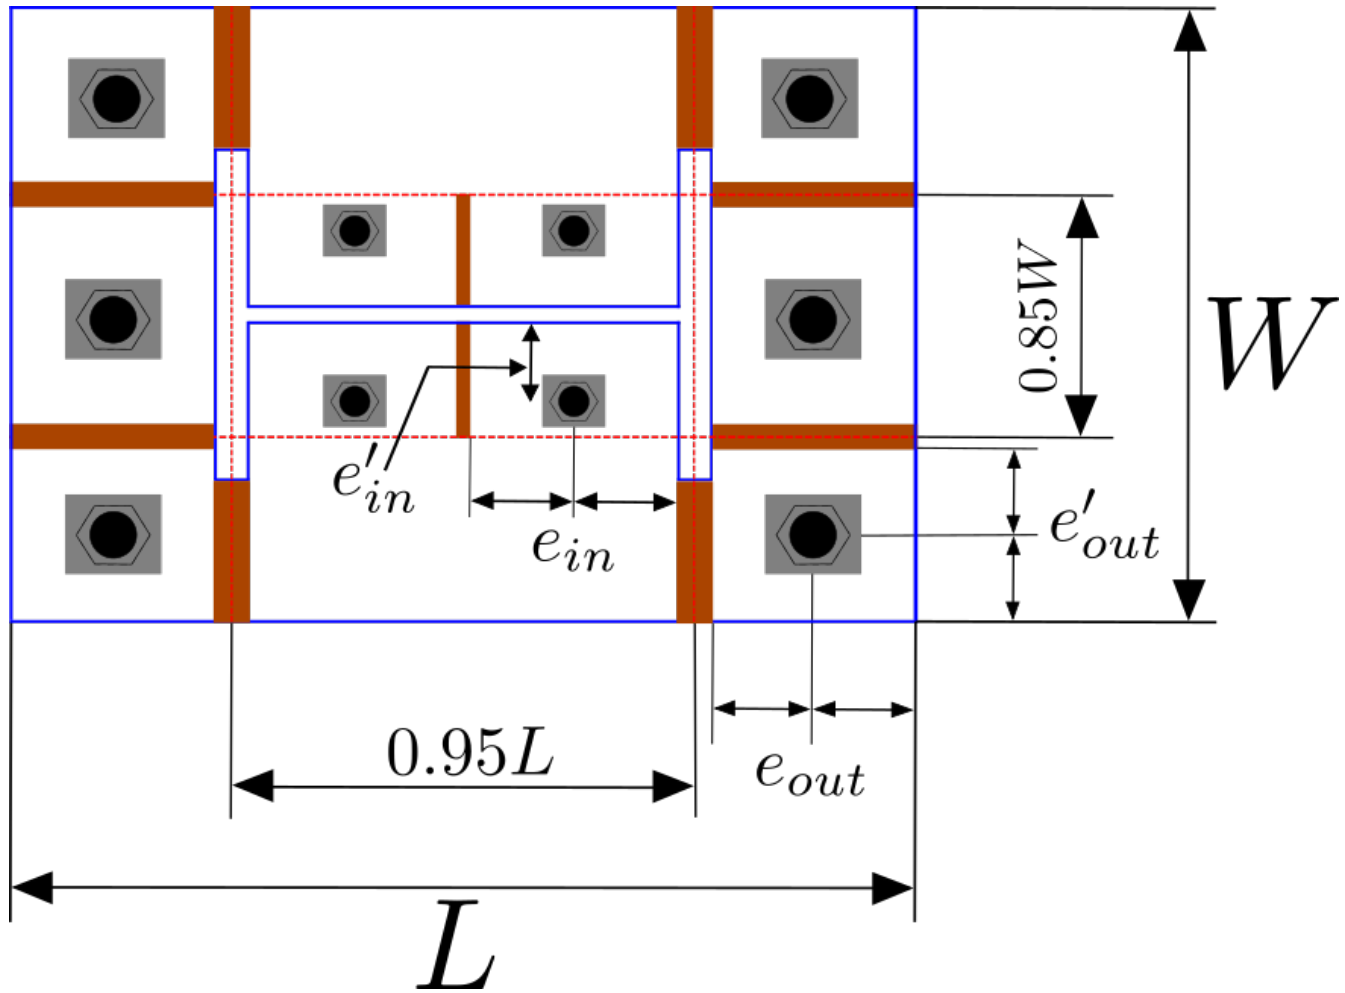


Figure 2: Typical Base Plate Detailing



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |


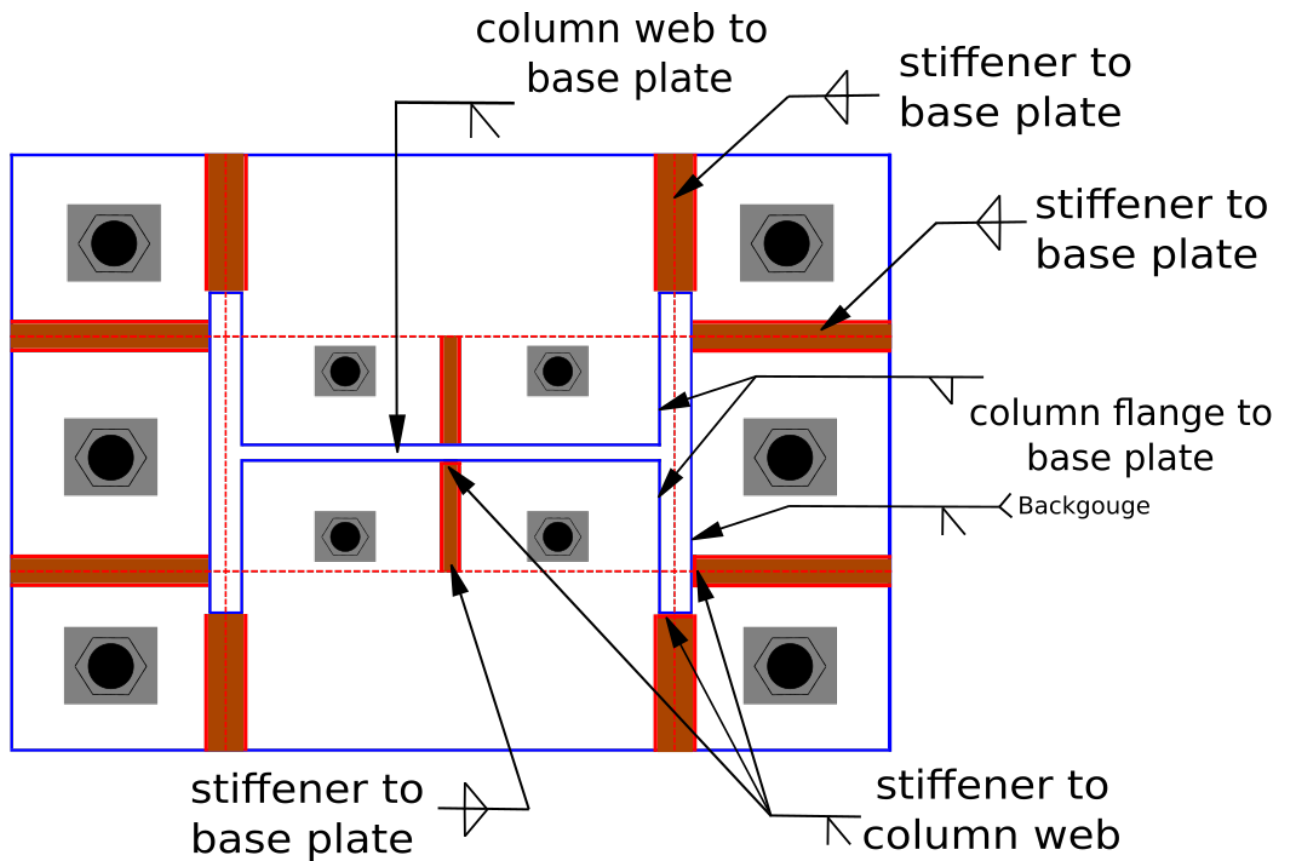


Figure 3: Typical Weld Details



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

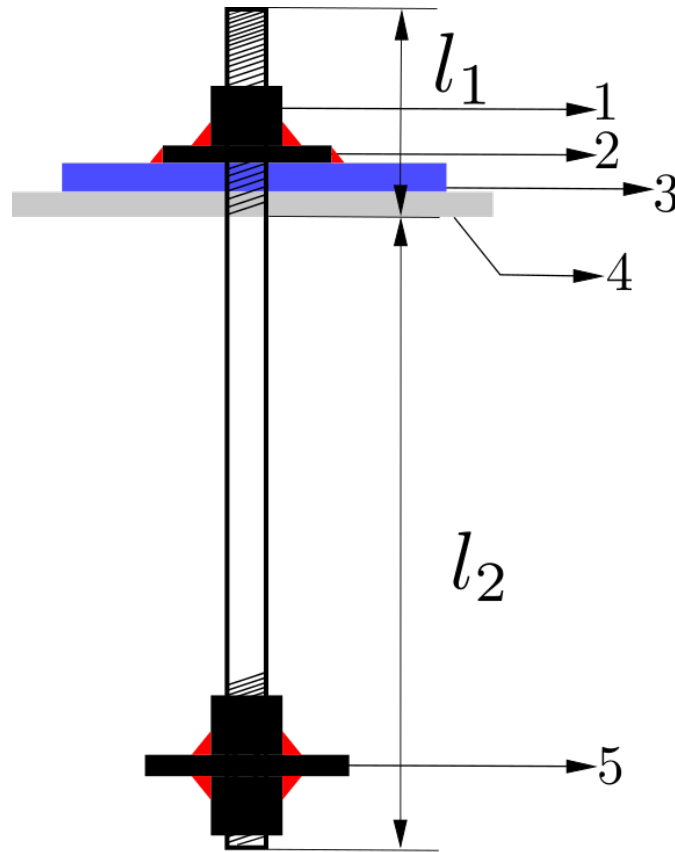


- $l_1$  = length above footing  
 $l_2$  = length below footing  
1 =  $t_n$ , nut thickness  
2 =  $t_w$ , washer thickness  
3 =  $t_p$ , plate thickness  
4 =  $t_g$ , grout thickness  
5 = end plate thickness

Figure 4: Typical Anchor Bolt Details



|                 |              |               |                            |
|-----------------|--------------|---------------|----------------------------|
| Company Name    | IIT Bombay   | Project Title | Base Plate                 |
| Group/Team Name | Osdag        | Subtitle      | Welded Base Plate          |
| Designer        | Engineer#1   | Job Number    | 1.3.2.1                    |
| Date            | 04 /02 /2021 | Client        | Mr. Yogesh D Pisal, Mumbai |

## 4 3D Views

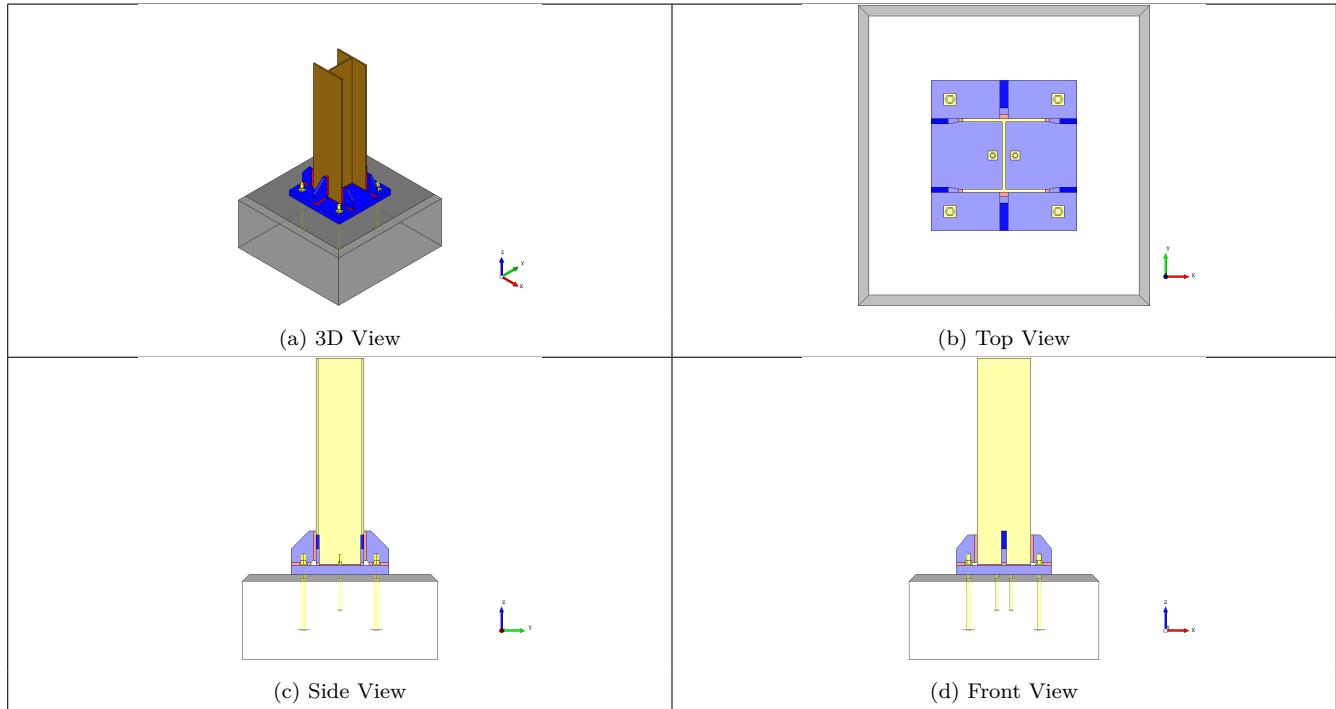

## 5 Design Log

2021-02-04 15:19:28 - Osdag - WARNING - The Load(s) defined is/are less than the minimum recommended value [Ref. IS 800:2007, Cl.10.7].

2021-02-04 15:19:28 - Osdag - WARNING - [Minimum Factored Load] The external factored bending moment (123.0 kNm) is less than 0.5 times the plastic moment capacity of the column (404.09 kNm)

2021-02-04 15:19:28 - Osdag - INFO - The minimum factored bending moment should be at least 0.5 times the plastic moment capacity of the beam to qualify the connection as rigid connection

2021-02-04 15:19:28 - Osdag - INFO - The value of load(s) is/are set at minimum recommended value as per Cl.10.7

2021-02-04 15:19:28 - Osdag - INFO - Designing the connection for a factored moment of 404.09 kNm

2021-02-04 15:19:28 - Osdag - INFO - [Base Plate Type] The value of eccentricity about the major axis is 236 mm



2021-02-04 15:19:28 - Osdag - INFO - Eccentricity is greater than 210.67 (L/3) mm

2021-02-04 15:19:28 - Osdag - INFO - Case 3: A smaller part of the base plate is under pure compression/bearing with a large tension/uplift force being transferred through the anchor bolts outside column flange on the tension side

2021-02-04 15:19:28 - Osdag - INFO - [Base Plate Type] The value of eccentricity about the major axis is 236 mm

2021-02-04 15:19:28 - Osdag - INFO - Eccentricity is greater than 237.33 (L/3) mm

2021-02-04 15:19:28 - Osdag - INFO - Case 3: A smaller part of the base plate is under pure compression/bearing with a large

|                                                                                  |              |                                                                                                        |                            |
|----------------------------------------------------------------------------------|--------------|--------------------------------------------------------------------------------------------------------|----------------------------|
|  |              | Created with  Osdag® |                            |
| Company Name                                                                     | IIT Bombay   | Project Title                                                                                          | Base Plate                 |
| Group/Team Name                                                                  | Osdag        | Subtitle                                                                                               | Welded Base Plate          |
| Designer                                                                         | Engineer#1   | Job Number                                                                                             | 1.3.2.1                    |
| Date                                                                             | 04 /02 /2021 | Client                                                                                                 | Mr. Yogesh D Pisal, Mumbai |

tension/uplift force being transferred through the anchor bolts outside column flange on the tension side

2021-02-04 15:19:28 - Osdag - INFO - [Design for Shear] The shear resistance of the base plate assembly due to the friction between the base plate and the grout/concrete material is 764.5914 kN

2021-02-04 15:19:28 - Osdag - INFO - The horizontal shear force - 85.0 kN, is less than the shear resistance of the base plate

2021-02-04 15:19:28 - Osdag - INFO - Shear key is not required

2021-02-04 15:19:28 - Osdag - INFO - [Design for Shear] The shear resistance of the base plate assembly due to the friction between the base plate and the grout/concrete material is 764.5914 kN

2021-02-04 15:19:28 - Osdag - INFO - The horizontal shear force - 85.0 kN, is less than the shear resistance of the base plate

2021-02-04 15:19:28 - Osdag - INFO - Shear key is not required

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] The length of the anchor bolt is computed assuming the anchor bolt is casted in-situ during the erection of the column.

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] The recommended range for the length of the anchor bolt of thread size 30 mm is as follows:

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] Minimum length = 320 mm, Maximum length = 2000 mm.

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] The provided length of the anchor bolt is 559.7 mm

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt] Designer/Erector should provide adequate anchorage depending on the availability of standard lengths and sizes, satisfying the recommended range

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] Reference: IS 5624:1993, Table 1

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] The recommended range for the length of the anchor bolt of thread size 20 mm is as follows:

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] Minimum length = 200 mm, Maximum length = 800 mm.

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] The provided length of the anchor bolt is 409.5 mm

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt] Designer/Erector should provide adequate anchorage depending on the availability of standard lengths and sizes, satisfying the recommended range

2021-02-04 15:19:28 - Osdag - INFO - [Anchor Bolt Length] Reference: IS 5624:1993, Table 1

2021-02-04 15:19:28 - Osdag - WARNING - [Shear Check - Stiffener] The stiffener along the flange fails the shear check

2021-02-04 15:19:28 - Osdag - WARNING - The shear demand on the stiffener (381.34 kN) exceeds 60% of it's capacity (253.82 kN)

2021-02-04 15:19:28 - Osdag - INFO - Increasing the thickness of the stiffener and re-checking against shear demand

2021-02-04 15:19:28 - Osdag - WARNING - [Shear Check - Stiffener] The stiffener along the web fails the shear check

2021-02-04 15:19:28 - Osdag - WARNING - The shear demand on the stiffener (665.94 kN) exceeds 60% of it's capacity (291.61 kN)

2021-02-04 15:19:28 - Osdag - INFO - Increasing the thickness of the stiffener and re-checking against shear demand

2021-02-04 15:19:28 - Osdag - INFO - : ===== Design Status =====

2021-02-04 15:19:28 - Osdag - INFO - : Overall base plate connection design is SAFE

2021-02-04 15:19:28 - Osdag - INFO - : ===== End Of Design =====