



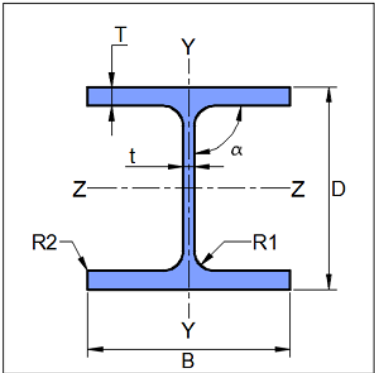

Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

1 Input Parameters

Main Module		Shear Connection		
Module		Cleat Angle Connection		
Connectivity		Column Flange-Beam Web		
Shear Force (kN)		240.0		
Supporting Section - Mechanical Properties				
	Supporting Section		UC 305 x 305 x 118	
	Material		E 300 (Fe 440)	
	Ultimate Strength, F_u (MPa)		440	
	Yield Strength, F_y (MPa)		300	
	Mass, m (kg/m)	117.9	I_z (cm ⁴)	27672.0
	Area, A (cm ²)	150.2	I_y (cm ⁴)	9058.0
	D (mm)	314.5	r_z (cm)	13.6
	B (mm)	307.4	r_y (cm)	7.77
	t (mm)	12.0	Z_z (cm ³)	1760.0
	T (mm)	18.7	Z_y (cm ³)	589.0
	Flange Slope	90	Z_{pz} (cm ³)	1958.0
	R_1 (mm)	15.2	Z_{py} (cm ³)	895.0
	R_2 (mm)	0.0		
	Supported Section - Mechanical Properties			
	Supported Section		MB 450	
	Material		E 300 (Fe 440)	
	Ultimate Strength, F_u (MPa)		440	
	Yield Strength, F_y (MPa)		300	
	Mass, m (kg/m)	72.38	I_z (cm ⁴)	30400.0
	Area, A (cm ²)	92.2	I_y (cm ⁴)	834.0
	D (mm)	450.0	r_z (cm)	18.1
	B (mm)	150.0	r_y (cm)	3.0
	t (mm)	9.4	Z_z (cm ³)	1350.0
	T (mm)	17.4	Z_y (cm ³)	111.0
	Flange Slope	98	Z_{pz} (cm ³)	1550.0
	R_1 (mm)	15.0	Z_{py} (cm ³)	187.0
	R_2 (mm)	7.5		
	Bolt Details - Input and Design Preference			

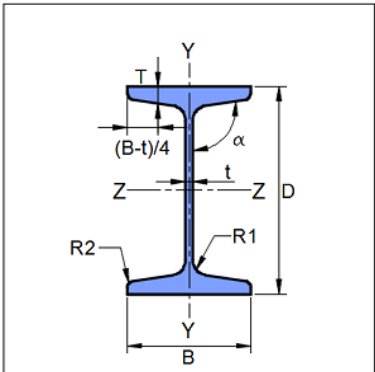

Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Diameter (mm)	[20]
Property Class	[12.9]
Type	Friction Grip Bolt
Hole Type	Standard
Slip Factor, (μ_f)	0.33
Detailing - Design Preference	
Edge Preparation Method	Rolled, machine-flame cut, sawn and planed
Gap Between Members (mm)	10.0
Are the Members Exposed to Corrosive Influences?	False

1.1 List of Input Section

Cleat Angle List	'120 x 120 x 8'
------------------	-----------------



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

2 Design Checks

Design Status	Pass
---------------	------

2.1 Selected Member Data

	Section Size		120 x 120 x 8	
	Material		E 250 (Fe 410 W)A	
	Ultimate Strength, F_u (MPa)		410	
	Yield Strength, F_y (MPa)		250	
	Mass, m (kg/m)	14.66	I_u (cm ⁴)	410.0
	Area, A (cm ²)	18.6	I_v (cm ⁴)	105.0
	A (mm)	120.0	r_z (cm)	3.72
	B (mm)	120.0	r_y (cm)	3.72
	t (mm)	8.0	r_u (cm)	4.69
	R_1 (mm)	10.0	r_v (cm)	2.38
	R_2 (mm)	4.8	Z_z (cm ³)	29.5
	C_y (mm)	32.5	Z_y (cm ³)	29.5
	C_z (mm)	32.5	Z_{pz} (cm ³)	53.4
	I_z (cm ⁴)	258.0	Z_{py} (cm ³)	29.5
	I_y (cm ⁴)	258.0		

2.2 Initial Section Check

Check	Required	Provided	Remarks
Shear Yielding Capacity (kN)	240.0	$V_{dy} = \frac{A_v f_y}{\sqrt{3} \gamma_{m0}}$ $= \frac{450.0 \times 9.4 \times 300}{\sqrt{3} \times 1.1 \times 1000}$ $= 666.05$ [Ref. IS 800:2007, Cl.10.4.3]	Pass
Allowable Shear Capacity (kN)	240.0	$V_d = 0.6 V_{dy}$ $= 0.6 \times 666.05$ $= 399.63$ [Limited to low shear]	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

2.3 Load Consideration

Check	Required	Provided	Remarks
Applied Shear Force (kN)	240.0	$V_{y_{min}} = \min(0.15V_{dy}, 40.0)$ $= \min(0.15 \times 666.05, 40.0)$ $= 40$ $V_u = \max(V_y, V_{y_{min}})$ $= \max(240.0, 40)$ $= 240.0$ [Ref. IS 800:2007, Cl.10.7]	

2.4 Bolt Design - Connected to Beam

Check	Required	Provided	Remarks
Diameter (mm)		20	
Property Class		12.9	
Cleat Angle Connection		120 x 120 x 8	
No. of Bolt Columns		1	
No. of Bolt Rows		3	
Min. Pitch Distance (mm)	$p_{min} = 2.5d$ $= 2.5 \times 20$ $= 50.0$ [Ref. IS 800:2007, Cl.10.2.2]	85	Pass
Max. Pitch Distance (mm)	$p_{max} = \min(32t, 300)$ $= \min(32 \times 8.0, 300)$ $= \min(256.0, 300)$ $= 256.0$ Where, $t = \min(8.0, 9.4)$ [Ref. IS 800:2007, Cl.10.2.3]	85	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Min. Gauge Distance (mm)	$g_{\min} = 2.5d$ $= 2.5 \times 20$ $= 50.0$ [Ref. IS 800:2007, Cl.10.2.2]	N/A	
Max. Gauge Distance (mm)	$g_{\max} = \min(32t, 300)$ $= \min(32 \times 8.0, 300)$ $= \min(256.0, 300)$ $= 256.0$ Where, $t = \min(8.0, 9.4)$ [Ref. IS 800:2007, Cl.10.2.3]	N/A	
Min. End Distance (mm)	$e_{\min} = 1.5d_0$ $= 1.5 \times 22.0$ $= 33.0$ [Ref. IS 800:2007, Cl.10.2.4.2]	35	Pass
Max. End Distance (mm)	$e_{\max} = 12t\varepsilon; \varepsilon = \sqrt{\frac{250}{f_y}}$ $e_1 = 12 \times 8.0 \times \sqrt{\frac{250}{250}} = 96.0$ $e_2 = 12 \times 9.4 \times \sqrt{\frac{250}{300}} = 102.97$ $e_{\max} = \min(e_1, e_2) = 96.0$ [Ref. IS 800:2007, Cl.10.2.4.3]	35	Pass
Min. Edge Distance (mm)	$e'_{\min} = 1.5d_0$ $= 1.5 \times 22.0$ $= 33.0$ [Ref. IS 800:2007, Cl.10.2.4.2]	35	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Max. Edge Distance (mm)	$e'_{\max} = 12t\epsilon; \epsilon = \sqrt{\frac{250}{f_y}}$ $e_1 = 12 \times 8.0 \times \sqrt{\frac{250}{250}} = 96.0$ $e_2 = 12 \times 9.4 \times \sqrt{\frac{250}{300}} = 102.97$ $e'_{\max} = \min(e_1, e_2) = 96.0$ <p>[Ref. IS 800:2007, Cl.10.2.4.3]</p>	35	Pass
Moment Demand (kNm)		$M_d = (V_u \times ecc + M_w)$ <p>$ecc = \text{eccentricity}$ $M_w = \text{external moment acting on web}$</p> $= \frac{(240.0 \times 10^3 \times 53.0 + 0.0 \times 10^6)}{10^6}$ $= 12720.0$	
Bolt Force Parameter(s) (mm)	$l_n = \text{length available}$ $l_n = p (n_r - 1)$ $= 85 \times (3 - 1)$ $= 170$ $y_{\max} = l_n / 2$ $= 170 / 2$ $= 85.0$ $x_{\max} = g(n_c - 1) / 2$ $= 0.0 \times (1 - 1) / 2$ $= 0.0$		



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Bolt.Force (kN)	$v_b v_u = V_u / (n_r \times n_c)$ $= \frac{240.0}{(3 \times 1)}$ $= 80.0$ $t_m h = \frac{M_d \times y_{\max}}{\sum r_i^2}$ $= \frac{12720.0 \times 85.0}{14.45}$ $= 74.82$ $t_m v = \frac{M_d \times x_{\max}}{\sum r_i^2}$ $= \frac{12720.0 \times 0.0}{14.45}$ $= 0.0$ $a_b h = \frac{A_u}{(n_r \times n_c)}$ $= \frac{0.0}{(3 \times 1)}$ $= 0.0$ $v_{\text{res}} = \sqrt{(v_b v_u + t_m v)^2 + (t_m h + a_b h)^2}$ $= \sqrt{(80.0 + 0.0)^2 + (74.82 + 0.0)^2}$ $= 109.54$		
Slip Resistance		$V_{dsf} = \frac{\mu_f n_e K_h F_o}{\gamma_{mf}}$ <p>Where , $F_o = 0.7 f_{ub} A_{nb}$</p> $V_{dsf} = \frac{0.33 \times 1 \times 1.0 \times 0.7 \times 1220.0 \times 245}{1.25 \times 10^3}$ $= 110.47$ <p>[Ref. IS 800:2007, Cl.10.4.3]</p>	



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Long Joint Reduction Factor		$l_j = (n_r - 1) \times p$ $= (3 - 1) \times 85 = 170$ $l = 170$ $15 \times d = 15 \times 20 = 300$ <p>since, $l_j < 15 \times d$ then $\beta_{lj} = 1.0$</p> <p>[Ref. IS 800:2007, Cl.10.3.3.1]</p>	
Large Grip Length Reduction Factor		$l_g = \Sigma (t_p + t_{\text{member}})$ $= 25.4$ $5d = 100$ $8d = 160$ <p>since, $l_g < 5d$; $\beta_{lg} = 1.0$</p> <p>[Ref. IS 800:2007, Cl.10.3.3.2]</p>	N/A
Bolt Capacity (post reduction factor) (kN)		$V_{rd} = \beta_{lj} \beta_{lg} V_{db}$ $= 1.0 \times 1.0 \times 110.47$ $= 110.47$	
Capacity (kN)	109.54	110.47	Pass

2.5 Bolt Design - Connected to Column

Check	Required	Provided	Remarks
Diameter (mm)		20	
Property Class		12.9	
Cleat Angle Connection		120 x 120 x 8	
No. of Bolt Columns		1	
No. of Bolt Rows		3	
Min. Pitch Distance (mm)	$p_{\min} = 2.5d$ $= 2.5 \times 20$ $= 50.0$ <p>[Ref. IS 800:2007, Cl.10.2.2]</p>	85	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Max. Pitch Distance (mm)	$p_{\max} = \min(32t, 300)$ $= \min(32 \times 8.0, 300)$ $= \min(256.0, 300)$ $= 256.0$ <p>Where, $t = \min(8.0, 18.7)$</p> <p>[Ref. IS 800:2007, Cl.10.2.3]</p>	85	Pass
Min. Gauge Distance (mm)	$g_{\min} = 2.5d$ $= 2.5 \times 20$ $= 50.0$ <p>[Ref. IS 800:2007, Cl.10.2.2]</p>	N/A	
Max. Gauge Distance (mm)	$g_{\max} = \min(32t, 300)$ $= \min(32 \times 8.0, 300)$ $= \min(256.0, 300)$ $= 256.0$ <p>Where, $t = \min(8.0, 18.7)$</p> <p>[Ref. IS 800:2007, Cl.10.2.3]</p>	N/A	
Min. End Distance (mm)	$e_{\min} = 1.5d_0$ $= 1.5 \times 22.0$ $= 33.0$ <p>[Ref. IS 800:2007, Cl.10.2.4.2]</p>	35	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Max. End Distance (mm)	$e_{\max} = 12t\varepsilon; \varepsilon = \sqrt{\frac{250}{f_y}}$ $e_1 = 12 \times 8.0 \times \sqrt{\frac{250}{250}} = 96.0$ $e_2 = 12 \times 18.7 \times \sqrt{\frac{250}{300}} = 204.85$ $e_{\max} = \min(e_1, e_2) = 96.0$ <p>[Ref. IS 800:2007, Cl.10.2.4.3]</p>	35	Pass
Min. Edge Distance (mm)	$e'_{\min} = 1.5d_0$ $= 1.5 \times 22.0$ $= 33.0$ <p>[Ref. IS 800:2007, Cl.10.2.4.2]</p>	35	Pass
Max. Edge Distance (mm)	$e'_{\max} = 12t\varepsilon; \varepsilon = \sqrt{\frac{250}{f_y}}$ $e_1 = 12 \times 8.0 \times \sqrt{\frac{250}{250}} = 96.0$ $e_2 = 12 \times 18.7 \times \sqrt{\frac{250}{300}} = 204.85$ $e'_{\max} = \min(e_1, e_2) = 96.0$ <p>[Ref. IS 800:2007, Cl.10.2.4.3]</p>	35	Pass
Moment Demand (kNm)		$M_d = (V_u \times ecc + M_w)$ <p>ecc = eccentricity M_w = external moment acting on web</p> $= \frac{(120.0 \times 10^3 \times 53.0 + 0.0 \times 10^6)}{10^6}$ $= 6360.0$	



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Bolt Force Parameter(s) (mm)	l_n = length available $l_n = p (n_r - 1)$ $= 85 \times (3 - 1)$ $= 170$ $y_{\max} = l_n / 2$ $= 170 / 2$ $= 85.0$ $x_{\max} = g(n_c - 1) / 2$ $= 0.0 \times (1 - 1) / 2$ $= 0.0$		



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Bolt.Force (kN)	$v_{bv} = V_u / (n_r \times n_c)$ $= \frac{240.0}{(3 \times 1)}$ $= 40.0$ $t_{mh} = \frac{M_d \times y_{\max}}{\Sigma r_i^2}$ $= \frac{6360.0 \times 85.0}{14.45}$ $= 37.41$ $t_{mv} = \frac{M_d \times x_{\max}}{\Sigma r_i^2}$ $= \frac{6360.0 \times 0.0}{14.45}$ $= 0.0$ $a_{bh} = \frac{A_u}{(n_r \times n_c)}$ $= \frac{0.0}{(3 \times 1)}$ $= 0.0$ $v_{\text{res}} = \sqrt{(v_{bv} + t_{mv})^2 + (t_{mh} + a_{bh})^2}$ $= \sqrt{(40.0 + 0.0)^2 + (37.41 + 0.0)^2}$ $= 54.77$		
Slip Resistance		$V_{dsf} = \frac{\mu_f n_e K_h F_o}{\gamma_{mf}}$ <p>Where , $F_o = 0.7 f_{ub} A_{nb}$</p> $V_{dsf} = \frac{0.33 \times 1 \times 1.0 \times 0.7 \times 1220.0 \times 245}{1.25 \times 10^3}$ $= 55.24$ <p>[Ref. IS 800:2007, Cl.10.4.3]</p>	



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Long Joint Reduction Factor		$l_j = (n_r - 1) \times p$ $= (3 - 1) \times 85 = 170$ $l = 170$ $15 \times d = 15 \times 20 = 300$ <p>since, $l_j < 15 \times d$ then $\beta_{lj} = 1.0$</p> <p>[Ref. IS 800:2007, Cl.10.3.3.1]</p>	
Large Grip Length Reduction Factor		$l_g = \Sigma (t_p + t_{\text{member}})$ $= 26.7$ $5d = 100$ $8d = 160$ <p>since, $l_g < 5d$; $\beta_{lg} = 1.0$</p> <p>[Ref. IS 800:2007, Cl.10.3.3.2]</p>	N/A
Bolt Capacity (post reduction factor) (kN)		$V_{rd} = \beta_{lj} \beta_{lg} V_{db}$ $= 1.0 \times 1.0 \times 55.24$ $= 55.24$	
Capacity (kN)	54.77	55.24	Pass

2.6 Cleat Angle Check

Check	Required	Provided	Remarks
Min. Cleat Angle Height	$0.6 \times (d_b - 2 \times t_f - 2 \times r_r)$ $= 0.6 \times (450.0 - 2 \times 17.4 - 2 \times 15.0)$ $= 231.12$ <p>[Ref. INSDAG, Ch.5, sec.5.2.3]</p>	240	Pass
Max. Cleat Angle Height	$d_b - 2(t_{bf} + r_{b1} + \text{gap})$ $= 314.5 - 2 \times (18.7 + 15.2 + 10)$ $= 385.2$	240	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Min. Leg Length (mm) (on supported leg)	$\max(\text{gap}, t_{\text{cleat}} + r_{\text{angle}} + 2e'_{\text{min}} + (n_c - 1)g_{\text{min}})$ $= \max(10.0, 8.0 + 10.0 + 2 \times 33.0 + (1 - 1) \times 50.0)$ $= 84.0$	120.0	Pass
Min. Leg Length (mm) (on supporting leg)	$t_{\text{cleat}} + r_{\text{angle}} + 2e'_{\text{min}} + (n_c - 1)g_{\text{min}}$ $= 8.0 + 10.0 + 2 \times 33.0 + (1 - 1) \times 50.0$ $= 84.0$	120.0	Pass
Min. Cleat Angle Thickness (mm)	$t_w = 0.5 \times 9.4 = 4.7$	8.0	Pass
Shear Yielding Capacity (kN)		$V_{dy} = \frac{A_v f_y}{\sqrt{3} \gamma_{m0}}$ $= \frac{2 \times 240 \times 8.0 \times 250}{\sqrt{3} \times 1.1 \times 1000}$ $= 503.87$ [Ref. IS 800:2007, Cl.10.4.3]	
Block Shear Capacity in Shear (kN)		$V_{db1} = \frac{A_{vg} f_y}{\sqrt{3} \gamma_{m0}} + \frac{0.9 A_{tn} f_u}{\gamma_{m1}}$ $V_{db2} = \frac{0.9 A_{vn} f_u}{\sqrt{3} \gamma_{m1}} + \frac{A_{tg} f_y}{\gamma_{m0}}$ $V_{db} = \min(V_{db1}, V_{db2}) = 536.31$ [Ref. IS 800:2007, Cl.6.4]	
Shear Capacity (kN)	240.0	$V_d = \min(V_{dy}, V_{db})$ $= \min(503.87, 536.31)$ $= 503.87$ [Ref. IS 800:2007, Cl.6.1]	Pass




Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

Check	Required	Provided	Remarks
Moment Capacity (kNm)	12.72	$M_{dz} = \frac{\beta_b Z_p f_y}{\gamma_{m0} \times 10^6}$ $= \frac{1.0 \times 230400.0 \times 250}{1.1 \times 10^6}$ $= 52.36$ <p>[Ref. IS 800:2007, Cl.8.2.1.2]</p>	Pass



Company Name	IIT Bombay	Project Title	Shear Connection
Group/Team Name	Osdag	Subtitle	Cleat Angle
Designer	Engineer#1	Job Number	1.1.3.1.2
Date	04 /02 /2021	Client	Mr. Somnath Mukherjee, Kolkata

3 3D Views

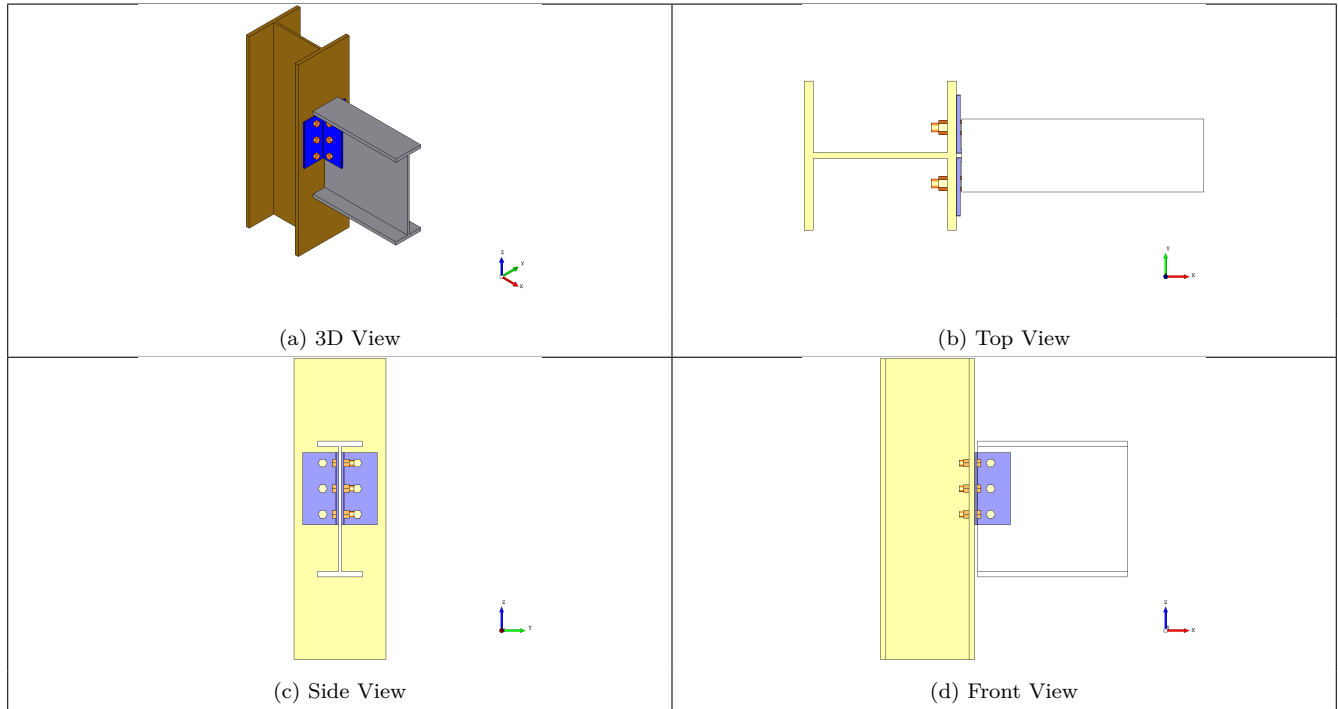

4 Design Log